



AT-PRO3HDREC - HDMI Extender over CAT5e/6/7  
Compatible with AT-PRO3HD44M only.

With the latest, more affordable, HDBaseT technology extend IR, RS-232, audio and video content between sources and displays up to 230ft (over CAT6/7) with the PRO3HD44M matrix switcher. With pass through support of up to 1080p or 1920x1200, 3D, 2Channel and Multi-channel audio, bidirectional RS-232 and IR signals.

## Go Further

Extend IR, RS-232, audio and visual content up to 230ft (@ 1080p) over a single CAT cable.

## Power over CAT5e/6/7

With the latest HDBaseT technology there's no need for a power source for your extenders. Simply connect your extender to the CAT5e/6/7 output on the PRO3HD44M Matrix.

## High Digital Performance

Pass through resolutions up to 1080p or 1920x1200 and audio formats from Lossy to Lossless multi-channel audio. *Includes Dolby TrueHD, DTS-HD Master Audio and 3D signals.*

## Bidirectional Control

With both an IR IN port and an IR OUT port send or receive commands through an IR remote control or 3rd party IR controller.




## SPECIFICATIONS

Bandwidth frequency	6.75 Gbps
Resolution outputs	Video: up to 1080p Vesa: up to 1920x1200
Input Ports	1 x CAT5e/6/7 1 x IR 3.5mm
Output Ports	1 x HDMI (Female type) 1 x IR 3.5mm 1 x RS-232 (3.5mm)
Dimensions (HxWxD)	0.875x2.75x3.56 (inch) or 22.23x69.85x90.42 (mm)
Weight	0.25lbs or 0.11kg
Temperature	Operating: 32°F to 104°F or 0°C to 40°C Storage: -4°F to 140°F or -20°C to 60°C
Power Consumption	6W

## PACKAGE CONTENTS

- 1 x AT-PRO3HDREC
- 1 x IR 3.5mm Receiver
- 1 x IR 3.5mm Emitter
- 1 x 3.5mm RS-232 to 9pin RS-232 adaptor
- 1 x User Manual

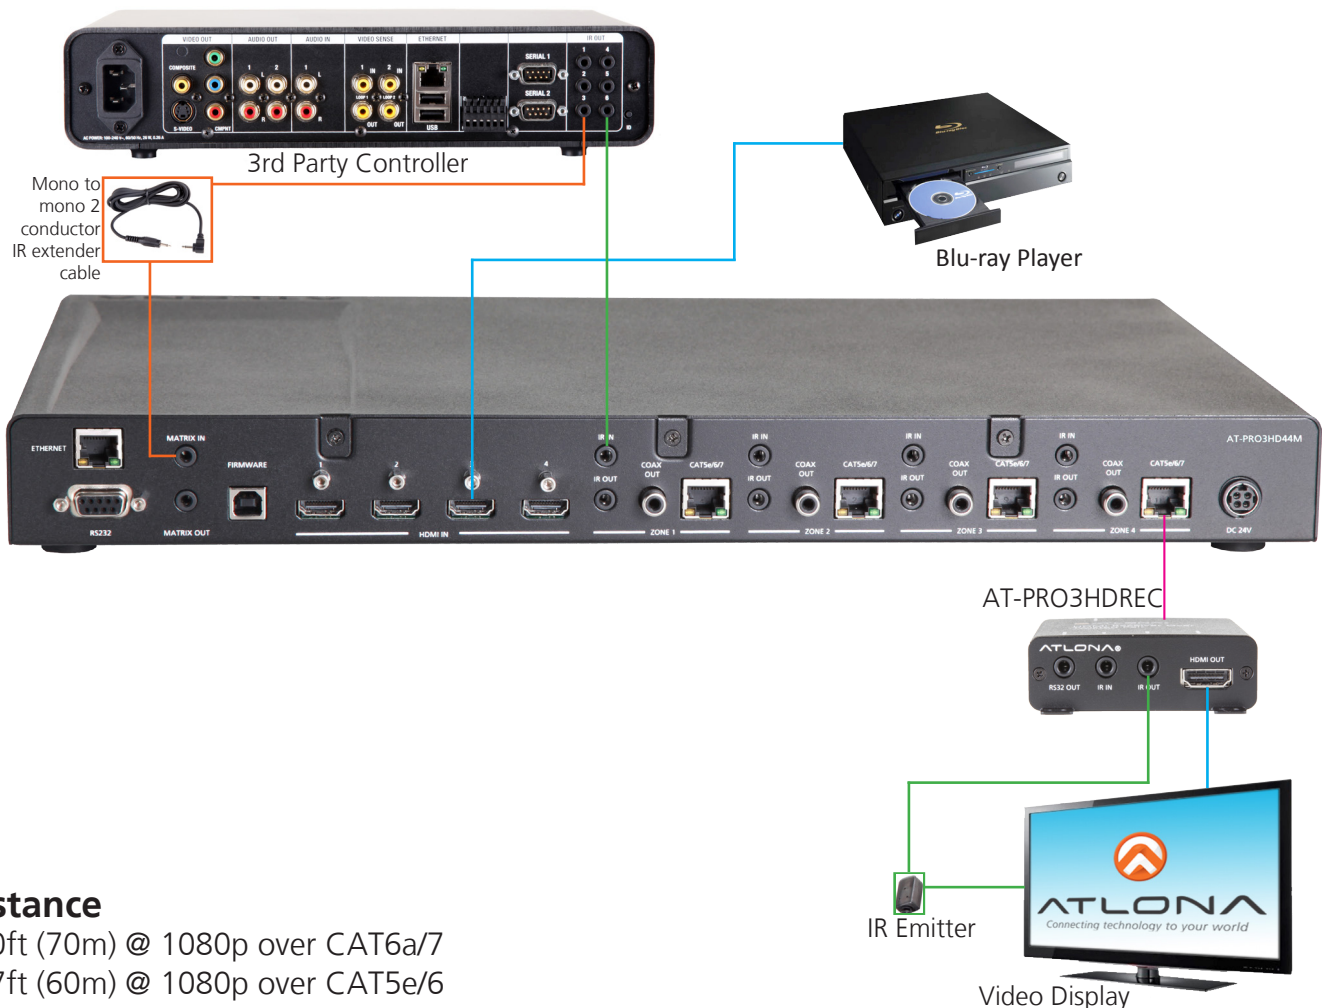

## Distance

230ft (70m) @ 1080p over CAT6a/7  
197ft (60m) @ 1080p over CAT5e/6