

## Update Instructions



**IMPORTANT:** Before updating the HDVS-150-RX, read the following instructions carefully!

The following procedure is used for updating the firmware on the AT-HDVS-150-RX.

### Requirements

- AT-HDVS-150-RX
- Firmware file: AT-HDVS-150-RX\_[version].bin
- USB Type A to Mini-USB Type B cable
- Computer with USB port


1. Check the bottom of the AT-HDVS-150-RX and identify the hardware revision:




- If the **Rev** letter (shown on the sticker on the bottom of the unit) is **A**, **B**, **C**, or **D**, then update using the 1.0.7 firmware.
- If the **Rev** letter is **E** or later, then update using the 2.0.01 firmware.




**NOTE:** If the incorrect firmware is applied to either unit, then this will cause loss of video. If this occurs, perform the firmware update process with the correct version of firmware to return the unit to proper operating condition.

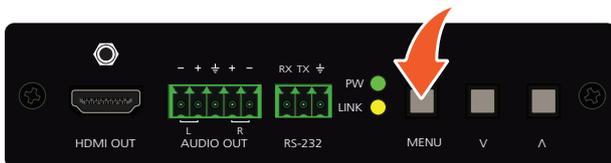

2. Disconnect the power supply from the AT-HDVS-150-RX.
3. Press and hold the **MENU** button.
4. While pressing the **MENU** button, connect the USB cable from the computer to the **FW** port on the AT-HDVS-150-RX. When the USB cable is connected, the **PWR** LED indicator will glow solid green.
5. After a few seconds, a folder with the name USB UPDATER, will be displayed. Release the **MENU** button.

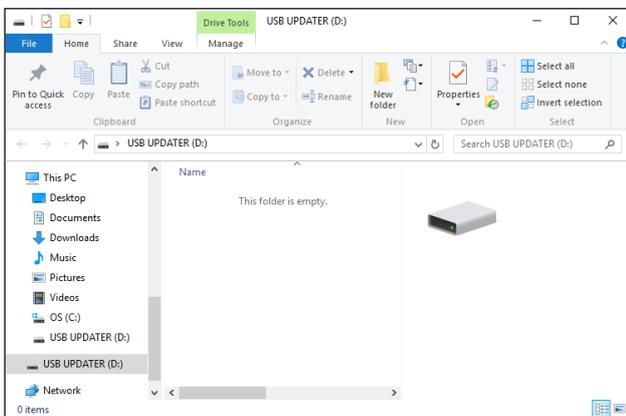

If the folder is not displayed, open Windows Explorer and locate the drive named USB UPDATER.

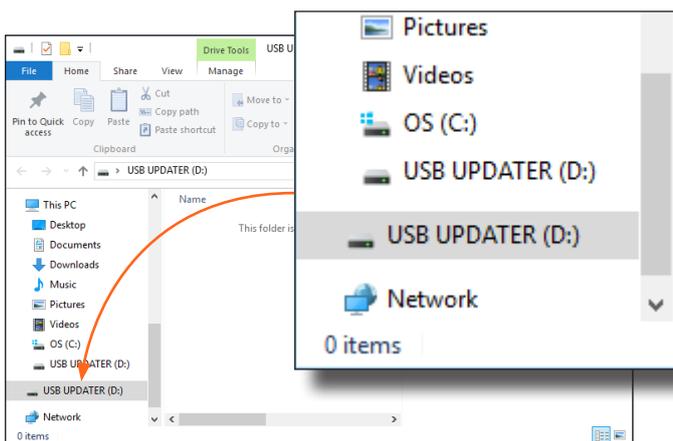

6. Delete all files from the USB drive, if any are present.
7. Drag-and-drop the AT-HDVS-150-RX\_[version].bin firmware file to the drive.
8. After the file has been copied, disconnect the USB cable from both the computer and the AT-HDVS-150-RX.
9. Reconnect the power supply to the AT-HDVS-150-RX.
10. The update process is complete.